


# SERIES 1300 ROTATING CONTROL DEVICES 11" thru 16"



The Washington Series 1300 is the original Rotating Control Device. This unit is designed to seal off the drill string components continuously and divert all cuttings and debris away from the rig. Designed Top Head and for Kelly Drive rigs, these units can handle up to a 5¼" Hex and 4½" Square. Bore sizes are listed below and most are stock items. The 1300 Series Control Device utilizes our 1024 Stripper Rubbers and will seal off all drill steel from 2" - 8" OD. We have a well stocked inventory of parts and excellent service to keep down time to a minimum.

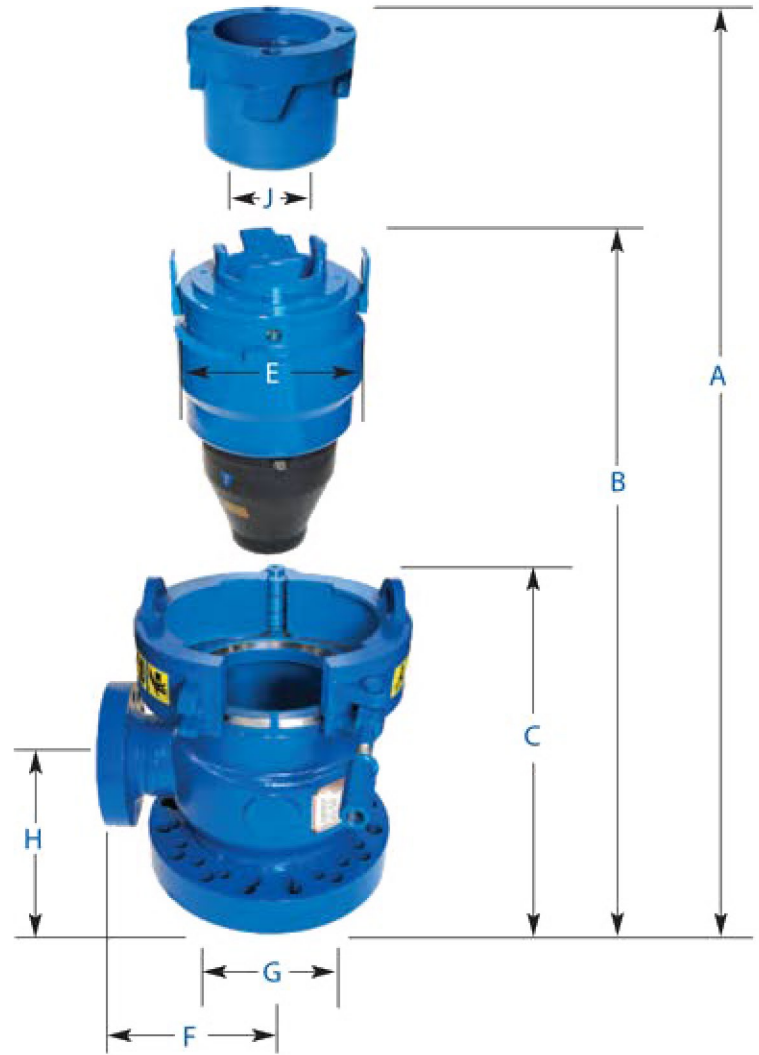

### AVAILABLE OUTLET FLANGES

Size	Ring Gasket
7½" - 3000	R-45
9" - 3000	R-49
11" - 3000	R-53

Nominal Flange Size	A	B	C	D	E	Body Bore F	G	Sleeve Bore H	Ring Gasket
11"-3000	37½"	35⅝"	29"	17"	17"	11½"	11½"	8⅝"	R-53
11"-5000	37½"	35⅝"	29"	17"	17"	11½"	11½"	8⅝"	R-54
13½"-3000	36⅝"	34⅝"	27⅝"	17"	17"	14"	11½"	8⅝"	R-57
13½"-5000	37⅝"	35⅝"	28⅝"	17"	17"	14"	12¼"	8⅝"	BX-160

REV 11/14

Western Diverter  
p (970) 222-3333 | f (970) 222-333  
2453 Industrial Blvd.  
Grand Junction, CO 81505  
www.westerndiverter.com

*Our test pressures have been established through controlled test procedures. As a result of the ever-changing environment of well drilling operations along with wear and tear on equipment, which erodes longevity and safe operating parameters, Washington Rotating Control Heads, Inc., its Business Units, Agents and Affiliates make no warranty either expressed or implied on the test pressures contained herein. Washington Rotating Control Heads, Inc. does not under any circumstances recommend that its rotating control devices be used as primary blow out prevention equipment.*