


# SERIES 1360

## STRIPPER-TUBING HEAD



The Washington Stripper-Tubing Head is a Well Head/Tool that is designed to seal on the O.D. of a casing or tubing string while raising, lowering or rotating. It can be used on cavitation wells, reverse circulation operations, conventional drilling operations and as a circulation head.

The rubber is a self energized seal which does not require additional means for closure. The 9010 rubber is held securely in the head by means of a two piece hinge clamp for fast and easy access.

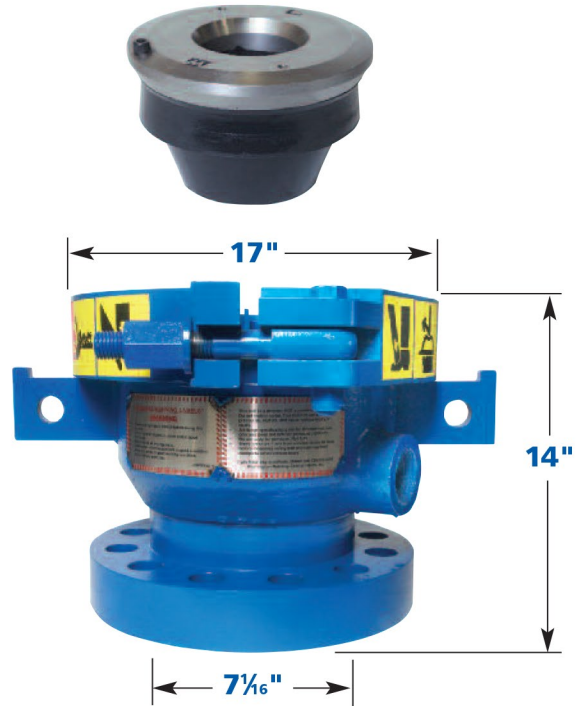

Inlet Flange	Height	Width	Ring Groove	I.D.	Weight	Outlet	Weight Capacity
7 $\frac{1}{6}$ " 3M	14 $\frac{1}{4}$ "	22 $\frac{3}{4}$ "	R-45	7 $\frac{1}{6}$ "	342 lbs.	2" NPT	170 US T
7 $\frac{1}{6}$ " 5M	15 $\frac{1}{4}$ "	22 $\frac{3}{4}$ "	R-46	7 $\frac{1}{6}$ "	362 lbs.	2" NPT	170 US T
9" 3M	14 $\frac{1}{4}$ "	23"	R-49	9"	535 lbs.	2" NPT	170 US T
9" 5M	15 $\frac{1}{4}$ "	23"	R-50	9"	535 lbs.	2" NPT	170 US T
11" 3M	15 $\frac{3}{4}$ "	23"	R-53	10"	615 lbs.	2" NPT	170 US T
11" 5M	17 $\frac{1}{2}$ "	23"	R-54	10"	670 lbs.	2" NPT	170 US T

REV 4/15

Western Diverter  
 p (970) 245-1089 | f (970) 245-1589  
 2453 Industrial Blvd.  
 Grand Junction, CO 81505  
 www.westerndiverter.com  
 info@westerndiverter.com

*Our test pressures have been established through controlled test procedures. As a result of the ever-changing environment of well drilling operations along with wear and tear on equipment, which erodes longevity and safe operating parameters, Washington Rotating Control Heads, Inc., its Business Units, Agents and Affiliates make no warranty either expressed or implied on the test pressures contained herein. Washington Rotating Control Heads, Inc. does not under any circumstances recommend that its rotating control devices be used as primary blow out prevention equipment.*