


SERIES 1400 ROTATING CONTROL DEVICES ("SHORTY")



The Washington Series 1400 "Shorty" Control Device has become the most popular design and offers the same durability and dependability as the 1300 series, with one considerable advantage, a much lower profile. The 1400 Series can be used with or without Drive Bushings and because it is so compact has become a very versatile Rotating Control Device. The 1400 Series Control Device utilizes our 4010 Stripper Rubbers and will seal off all drill steel from 2"-8" OD.

AVAILABLE OUTLET FLANGES

Size	Ring Gasket
7 ¹ / ₁₆ " - 3000	R-45
9" - 3000	R-49
11" - 3000	R-53

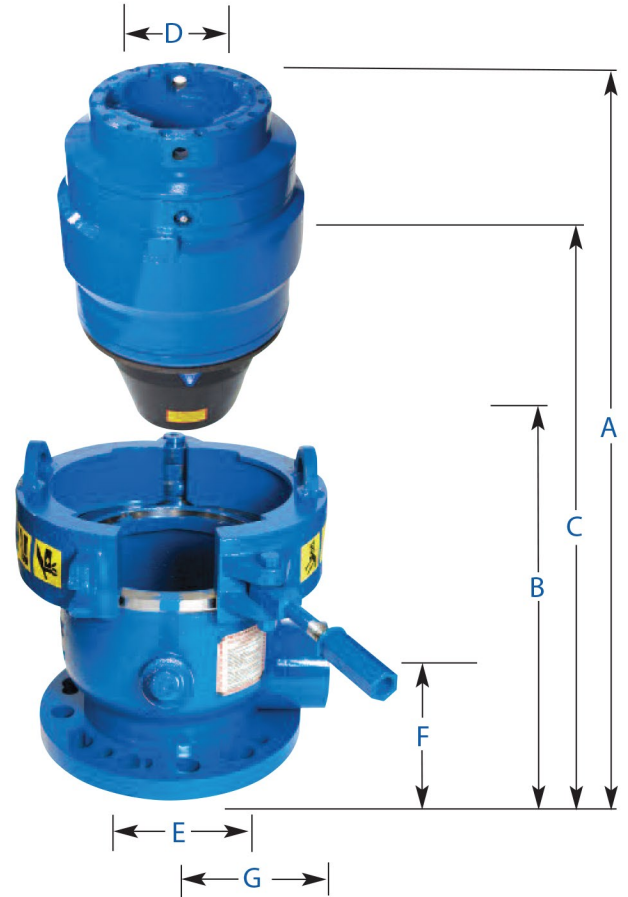

Nominal Flange Size	A	B	C	Sleeve Bore D	Body Bore E	F	G	Ring Gasket
11" - 3000	29"	22 ¹ / ₂ "	17"	8 ¹ / ₈ "	11 ¹ / ₈ "	6"	12 ¹ / ₂ "	R-53
11" - 5000	29"	22 ¹ / ₂ "	17"	8 ¹ / ₈ "	11 ¹ / ₈ "	6"	12 ¹ / ₂ "	R-54
13 ⁵ / ₈ " - 3000	29"	22 ¹ / ₂ "	17"	8 ¹ / ₈ "	14"	6"	13 ¹ / ₂ "	R-57
13 ⁵ / ₈ " - 5000	29"	22 ¹ / ₂ "	17"	8 ¹ / ₈ "	14"	6"	13 ¹ / ₂ "	BX-160

REV 06/15

Western Diverter
p (970) 222-3333 | f (970) 222-333
2453 Industrial Blvd.
Grand Junction, CO 81505
www.westerndiverter.com

Our test pressures have been established through controlled test procedures. As a result of the ever-changing environment of well drilling operations along with wear and tear on equipment, which erodes longevity and safe operating parameters, Washington Rotating Control Heads, Inc., its Business Units, Agents and Affiliates make no warranty either expressed or implied on the test pressures contained herein. Washington Rotating Control Heads, Inc. does not under any circumstances recommend that its rotating control devices be used as primary blow out prevention equipment.